
LET'S MOYE THE WORLD

COLD DRAWN SEAMLESS TUBES FOR OLEODYNAMICS CIRCUIT



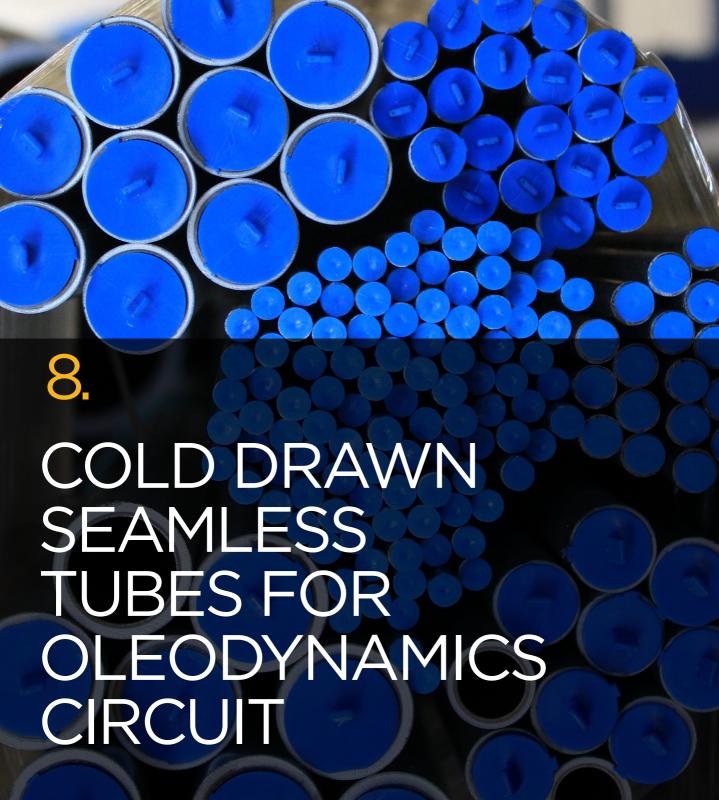

C.M.C. ITALIA, an international supplier of machined bars and tubes, can respond efficiently to customer requirements. The company's warehouse is always well stocked and, among other products, includes a wide range of honed cold-drawn seamless or welded tubes H8.

The raw tube is processed by material removal until the desired inner diameter is reached (rolling), thus preserving its dimensional tolerances. The inner diameter meets the tolerance H8 according to standard UNI EN ISO 286-2, with a roughness (Ra) of less than 0.4 micron.

COLD DRAWN SEAMLESS TUBES FOR OLEODYNAMICS CIRCUIT STEEL GRADE E235+N - EN 10305/4

DIMENSIONAL RANGE Black normalized

Ø/Sp	1	1,5	2	2,5	2,5	3	3,5	4	4,5	5	6
4	V										
5	√										
6	√	√	√								
8	√	√	√	√	√						
10	\checkmark	√	√	√	√						
12	\checkmark	√	√	√	√	√					
13	\checkmark	√	√	√	√	√					
14	√	√	√	√	√	√	√				
15	√	√	√	√	√	√					
16	√	√	√	√	√	√					
17		√	√	√	√	√					
18	\checkmark	√	√	√	√	√					
20	\checkmark	√	√	√	√	√	\checkmark	√		$\sqrt{}$	
22	\checkmark	√	√	√	√	√	\checkmark	√			
24	\checkmark	√	\checkmark								
25	\checkmark	√	√	√	√	√	√	√	√		
26	$\sqrt{}$					√					
28		√	√	√	√	√		√	√	$\sqrt{}$	
30		√	√	√	√	√	√	√		$\sqrt{}$	√
32		√	√	√	√	√	\checkmark	√	\checkmark		
34		√	√		√	√	√	√	√		
35		√	√	√	√	√	$\sqrt{}$	√	V	$\sqrt{}$	√
38			√	√	√	√		√	√	$\sqrt{}$	√
42			√			√		√		√	
48			√	√	√	√		√		$\sqrt{}$	√
50			√		√	√	√	√	1	V	√

DIMENSIONAL RANGE White galvanized

Ø/Sp	1	1,5	2	2,5	2,5	3	4	5	6
4	√								
5	√								
6	√	√	√						
8	√	√	√						
10	√	V	√	√	V				
12	√	V	√	√	√	√			
14	√	√	√	√	√	√			
15	√	V	√	V	√	√			
16	√	√	√	√	V	√			
18	√	V	√	V	V	√			
20	√	√	√	√	√	√	√		
22	√	V	√	V	√	√	√		
25	√	√	√	√	√	√	√		
28		V	√	√	V	√	√		
30			√		V	√	√	√	
32			√			√			
35			√		√	√	√	√	√
38			√			√	√	√	√
42			√			√	√		

